



## COOLING SYSTEM COOLER & TREATMENT

A unique formulation that restores coolant to its peak level of protection. It is designed for use in conventional, long life, hybrid, heavy duty and diesel coolants. It helps to promote more efficient heat transfer, restores critical additive balance, proper coolant pH, and provides protection against foaming and metallic corrosion.

### APPLICATION:


Safe for use in engine systems using antifreeze

### FEATURES & BENEFITS:

- Provides extra protection against corrosive wear of radiator and cooling system components
- Helps keep heat transfer surfaces free of deposits and scale
- Helps promote more efficient heat transfer
- Helps protect cooling system components
- Compatible with most types of Antifreeze
- Excellent for towing and racing applications
- No environmentally harmful dyes

### DIRECTIONS:

With engine off and cool, add contents of this bottle to coolant in radiator every 10,000 miles or once a year, whichever comes first.

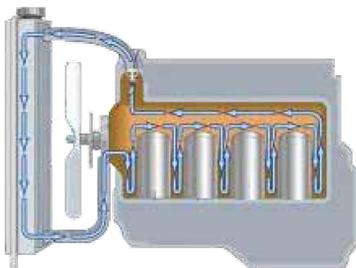

### HEALTH & SAFETY, ENVIRONMENT:

Prolonged and repeated contact with oil may cause skin disorders. Avoid contact. Wash immediately with soap and water. Do not discharge used oil in to drains or the environment. Dispose to an authorized used oil collection point. For further Information on Safety Guidelines please refer to MSDS available on our website [www.lubrex.net](http://www.lubrex.net)

### HEALTH & SAFETY:

This product is not likely to present any significant health or safety hazards when properly used in the recommended application and good standards of personal hygiene are maintained. Reference is made to the Safety Data Sheet (SDS) which is available on request via your local sales office or via the internet [www.lubrex.net](http://www.lubrex.net)

### PROTECT THE ENVIRONMENT

Take used oil to an authorized collection point. Comply with local regulation. Do not discharge into drains, soil or water.

### STORAGE:

We recommend to store all packages under cover. In case outside storage is unavoidable, drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Products should never be stored above 60°C, exposed to hot sun or freezing conditions.

™ Trademark of LUBREX, registered in various countries © 2005

All statements, information and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee, an express warranty or an implied warranty of merchantability or fitness for a particular purpose, or representation, express or implied, for which LUBREX and its affiliates assume legal responsibility.