



RADIATOR STOP LEAK

Radiator Stop Leak is a safe and efficient method of sealing leaks in the coolant system. Added to coolant, it flows through leak points in the coolant system, quickly and completely plugging them. As coolant flows through the hole in the system, particles build on each other around the hole until it is completely plugged.

APPLICATION:


- Safe for use in engine systems using antifreeze

FEATURES & BENEFITS:

- Provide temporary leak-stop protection to radiators and cooling systems
- Compatible with most types of Antifreeze
- No environmentally harmful dyes

DIRECTIONS:

Add contents with engine cool, remove radiator cap and start engine. Turn on heater and run about 5 minutes. Shake bottle well and pour entire contents into radiator. Make sure radiator is filled to normal level and replace radiator cap. On bottle is enough for systems up to 24-quart capacity. If leak doesn't stop, mechanical attention is needed.

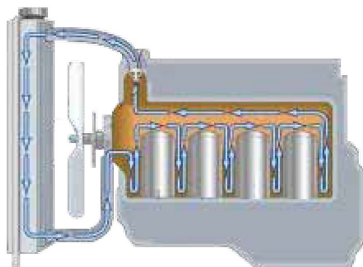

HEALTH & SAFETY, ENVIRONMENT:

Prolonged and repeated contact with oil may cause skin disorders. Avoid contact. Wash immediately with soap and water. Do not discharge used oil in to drains or the environment. Dispose to an authorized used oil collection point. For further Information on Safety Guidelines please refer to MSDS available on our website www.lubrex.net

HEALTH & SAFETY:

This product is not likely to present any significant health or safety hazards when properly used in the recommended application and good standards of personal hygiene are maintained. Reference is made to the Safety Data Sheet (SDS) which is available on request via your local sales office or via the internet www.lubrex.net

PROTECT THE ENVIRONMENT

Take used oil to an authorized collection point. Comply with local regulation. Do not discharge into drains, soil or water.

STORAGE:

We recommend to store all packages under cover. In case outside storage is unavoidable, drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Products should never be stored above 60°C, exposed to hot sun or freezing conditions.

™ Trademark of LUBREX, registered in various countries © 2005

All statements, information and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee, an express warranty or an implied warranty of merchantability or fitness for a particular purpose, or representation, express or implied, for which LUBREX and its affiliates assume legal responsibility.