



TRANSMISSION TREATMENT

A special additive to provide extra lubrication protection to automatic transmissions. Added to new and remaining transmission fluid left behind in the torque converter after a drain and refill service. Helps prevent deposit formation and fluid breakdown. Helps prevent transmission shudder and shifting problems and prevent transmission leaks by keeping seals soft and pliable. Helps prevent transmission failure.

APPLICATION:


- Recommend in use of most manual and automatic transmissions.
- Not recommended for CVT Transmissions

FEATURES & BENEFITS:

- Helps reduce wear
- Helps keep transmission clean
- Resists fluid oxidation and deposits
- Conditions seals and O-Rings
- Helps maintain proper viscosity
- Compatible with most ATF types
- Helps prevent oxidation and acid formation
- Replaces essential additives in ATF
- Contains metal conditioner
- No environmentally harmful dyes

DIRECTIONS:

- Add contents of bottle to fluid every 10,000 miles or once a year, whichever comes first. Do not overfill.

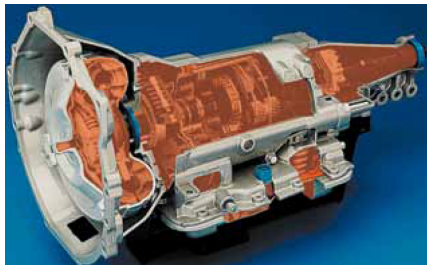

HEALTH & SAFETY, ENVIRONMENT:

Prolonged and repeated contact with oil may cause skin disorders. Avoid contact. Wash immediately with soap and water. Do not discharge used oil in to drains or the environment. Dispose to an authorized used oil collection point. For further Information on Safety Guidelines please refer to MSDS available on our website www.lubrex.net

HEALTH & SAFETY:

This product is not likely to present any significant health or safety hazards when properly used in the recommended application and good standards of personal hygiene are maintained. Reference is made to the Safety Data Sheet (SDS) which is available on request via your local sales office or via the internet www.lubrex.net

PROTECT THE ENVIRONMENT

Take used oil to an authorized collection point. Comply with local regulation. Do not discharge into drains, soil or water.

STORAGE:

We recommend to store all packages under cover. In case outside storage is unavoidable, drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Products should never be stored above 60°C, exposed to hot sun or freezing conditions.

™ Trademark of LUBREX, registered in various countries © 2005

All statements, information and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee, an express warranty or an implied warranty of merchantability or fitness for a particular purpose, or representation, express or implied, for which LUBREX and its affiliates assume legal responsibility.