



OIL TREATMENT

A premium grade lubrication booster and oil stabilizer which adds extra protection against wear and viscosity breakdown of any engine oil to which it is added. Contains powerful metal conditioner friction reducing metal conditioner, and a blend of anti-oxidant and corrosion inhibiting additives which help protect bearings from corrosion and wear. Helps extend the life of critical loaded surfaces within the engine through its exceptional lubrication performance. Helps increase engine compression and power by increasing oil viscosity. Helps seal rings to increase compression and reduce blow-by.

APPLICATION:


- Safe for use in all gasoline and diesel engines
- Safe for use with all conventional motor oils
- Synthetic blend motor oils
- Full synthetic motor oils

FEATURES & BENEFITS:

- Helps seal rings to increase compression and reduce blow-by.
- Improves oil viscosity
- Reduces engine friction and wear
- Provides extra protection for heavily loaded engines
- Fortifies against oxidation and thermal breakdown
- Compatible with all types of motors oils
- Contains metal conditioner
- Excellent for racing applications
- No environmentally harmful dyes

DIRECTIONS:

Add contents of this bottle to crankcase. Check for safe levels and do not overfill.

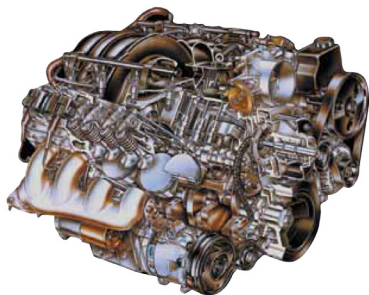

HEALTH & SAFETY, ENVIRONMENT:

Prolonged and repeated contact with oil may cause skin disorders. Avoid contact. Wash immediately with soap and water. Do not discharge used oil in to drains or the environment. Dispose to an authorized used oil collection point. For further Information on Safety Guidelines please refer to MSDS available on our website www.lubrex.net

HEALTH & SAFETY:

This product is not likely to present any significant health or safety hazards when properly used in the recommended application and good standards of personal hygiene are maintained. Reference is made to the Safety Data Sheet (SDS) which is available on request via your local sales office or via the internet www.lubrex.net

PROTECT THE ENVIRONMENT:

Take used oil to an authorized collection point. Comply with local regulation. Do not discharge into drains, soil or water.

STORAGE:

We recommend to store all packages under cover. In case outside storage is unavoidable, drums should be laid horizontally to avoid the possible ingress of water and damage to drum markings. Products should never be stored above 60°C, exposed to hot sun or freezing conditions.

™ Trademark of LUBREX, registered in various countries © 2005

All statements, information and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee, an express warranty or an implied warranty of merchantability or fitness for a particular purpose, or representation, express or implied, for which LUBREX and its affiliates assume legal responsibility.